



# Palm Treo Pro Motherboard Replacement

This guide will walk you step-by-step through the process to replace a faulty motherboard with a new one.

Written By: Nadia Carroll



## INTRODUCTION

The following 11 steps will help you replace a faulty motherboard with a new one.



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)
- [T5 Torx Screwdriver](#) (1)



### PARTS:

- [Palm Treo Pro Motherboard](#) (1)
-

## Step 1 — Battery



- Press down and forward on the back case to slide it out of place and remove it

## Step 2




- If a battery is already installed, remove it by pulling up on the tab near the camera lens.
- Insert the new battery into the open rectangle. Make sure the battery is oriented so that the Palm logo is in the upper-left corner opposite the camera lens

## Step 3 — Motherboard



- Use the Torx T5 screwdriver to remove the 5 visible 6mm screws on the back of the phone.
- ⓘ Be careful not to misplace these screws as they are very small and will be important during reassembly.
- ⓘ If the screws are stripped a flat head screw driver may be necessary.

## Step 4

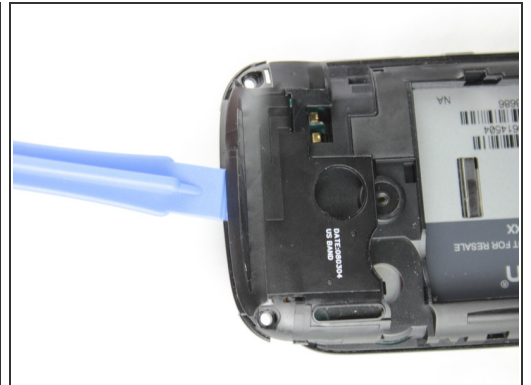

- Use a plastic opening tool to remove the small panel on the top of the phone by prying underneath the black plastic around the camera.



## Step 5




- Remove the main plastic body
  - Insert the plastic opening tool into the slot on the top (indicated by the spudger) and pry the black part off phone.
- ⓘ The bottom piece around the headphone and USB port may get caught during this step. Simply carefully maneuver the case until it is released.

## Step 6



- Use the Philips Head 00 screwdriver to unscrew the 3.5mm silver screw on the right hand side of the phone.
- Use the Philips Head 00 screwdriver to unscrew the two 3mm black screws in the upper right and lower left corners of the motherboard.

## Step 7

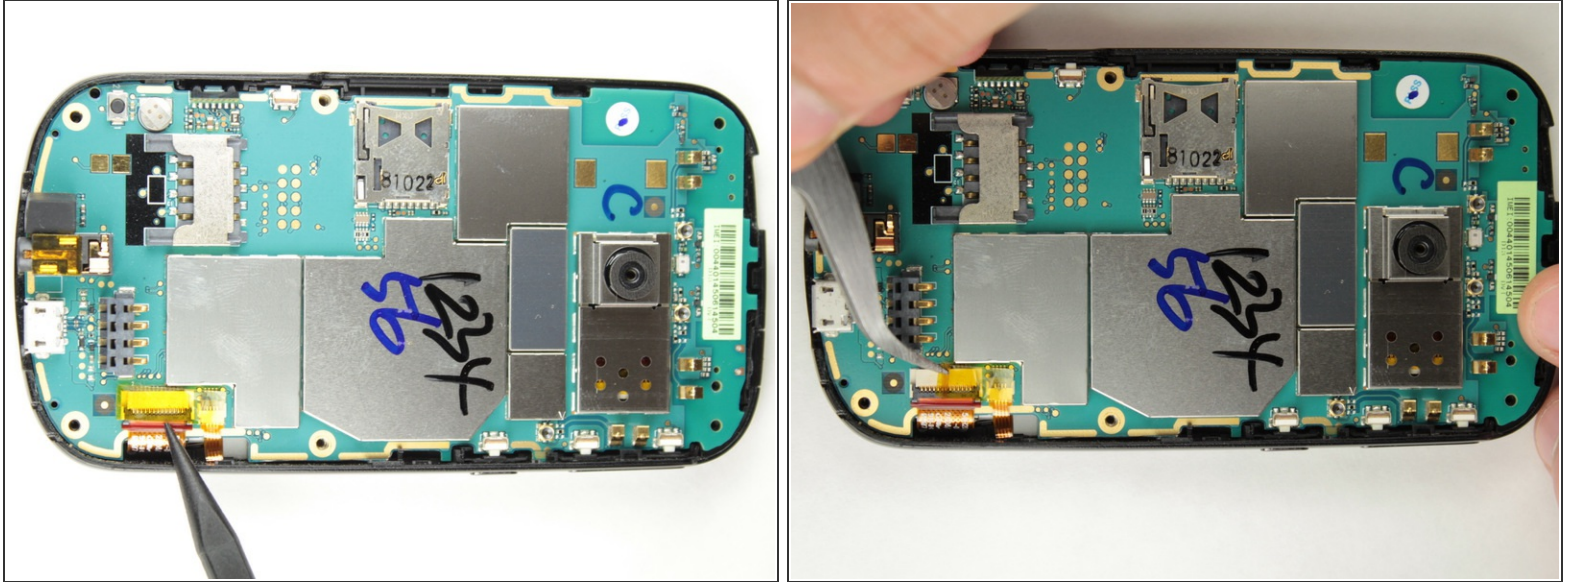


- Use tweezers to carefully remove the yellow piece of tape covering the two ribbon cables.

## Step 8



- There are two ribbon cables under the yellow tape.
- Use tweezers to safely unplug the small ribbon cable first and then the large ribbon cable.
- ❗ To remove the cables there is a small black lock that needs to be in the up position as indicated in picture two.

## Step 9

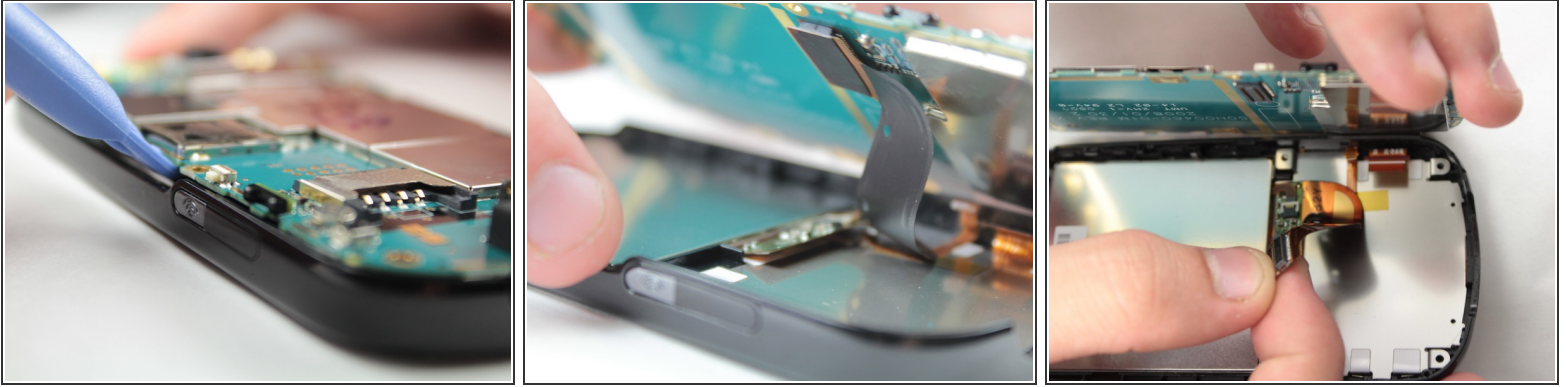

- Use a plastic opening tool to lift the motherboard up and out of the phone case
- There is a black cable under the motherboard that must be disconnected while the motherboard is still in the phone
- It can easily be disconnected with your fingers
- ⓘ Note: During this process the mute and power buttons may fall out of the phone. Do not panic this is completely normal. Set them aside in a safe place until reassembly.
- The motherboard has now been completely removed

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 11:59:43 AM.